



Sauna Stove

TYPE MSH

Comes in Minimalist Design

with double panel body that acts as the heat protector (jacket) of the stove, keeping the outside cool to prevent sauna wood from getting burned.

Included; Control Panel PSH - 800



Stainless Steel Top Cover

as the container of sauna rocks, made separated from the panel body, protecting the heater element from direct contact with the sauna rocks, resulting in long lasting heater element.

Smaller & Slimmer Digital


Panel complete with digital thermostat. Easy to use, even for beginners. It is used to turn on or off and control the sauna room temperature.



Separated Terminal Heater
Box on the side, so that the element last longer because of over pouring with water.




Adjustable Analog Thermostat
for automatic protection against the overheating of sauna stove. important in sauna stove usage, not only to provide maximum heating but can also be controlled automatically to prevent overheating that causes sauna woods to burn.



Galvanized Steel
for corrosion and rust protection.

SAUNA STOVE TYPE MSH



SPECIFICATIONS I

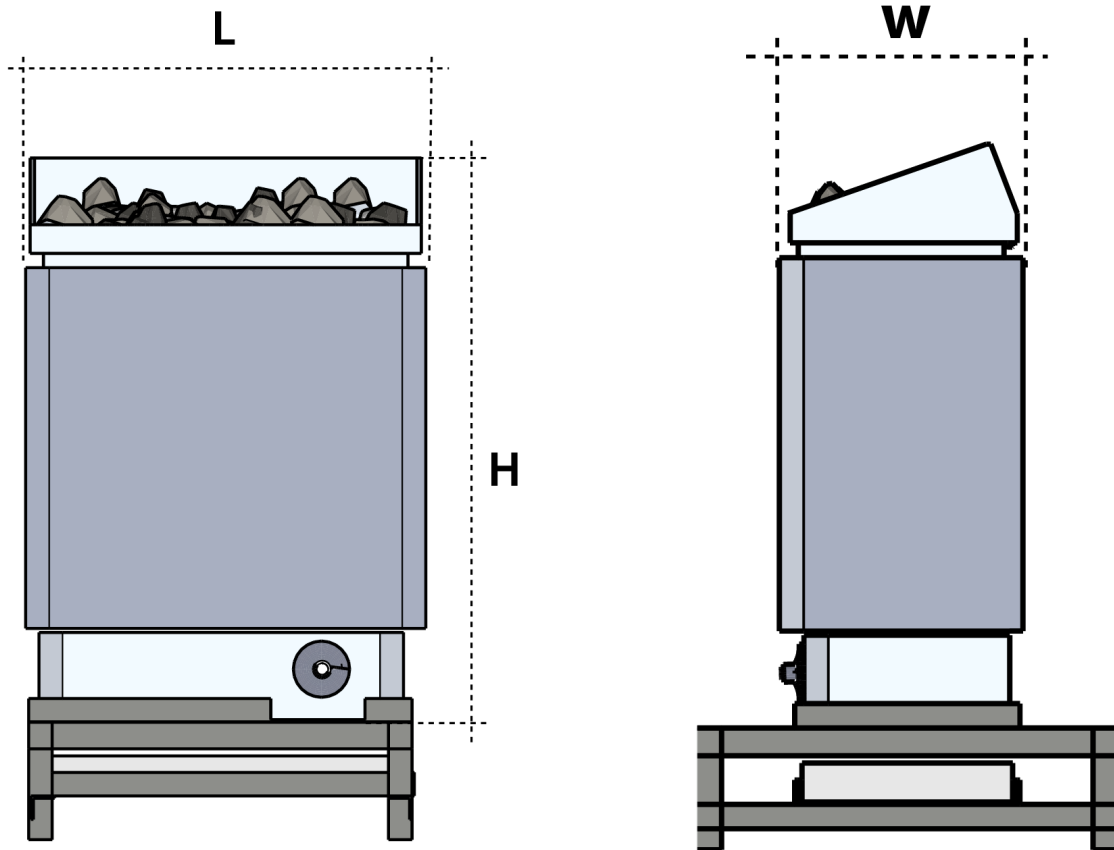

TYPE	L	W	H	Watt's KW	Phase	VAC	AMPS	Sensor Temperature MAX °C
MSH 30	400	200	600	3	3	220	13.0	300 °C
MSH 45	400	200	600	4.5	3	220	19.6	300 °C
MSH 60	440	260	620	6	3	220	26.1	300 °C
MSH 75	440	260	620	7.5	3	220	32.6	300 °C
MSH 90	440	260	620	9	3	220	39.1	300 °C
MSH 120	440	330	680	12	3	220	52.1	300 °C
MSH 150	440	330	680	15	3	220	65.2	300 °C
MSH 180	880	330	680	18	3	220	78.3	300 °C
MSH 240	880	330	680	24	3	220	104.3	300 °C

SAUNA STOVE TYPE MSH

SPECIFICATIONS II

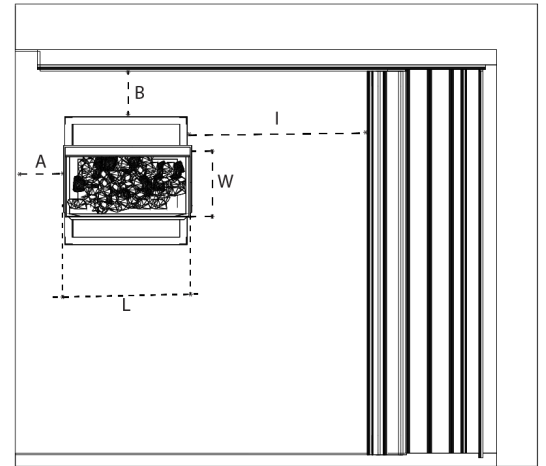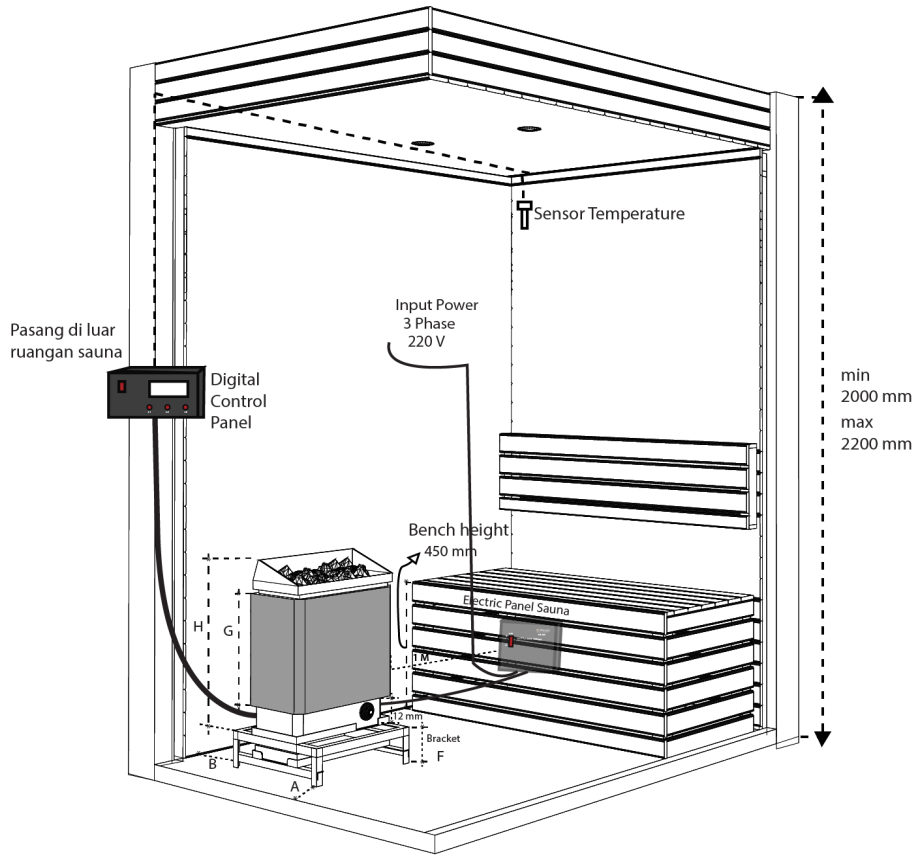

TYPE	DIMENSION (mm)						Weight	Minimum (mm)		Sensor Temperature MAX °C
	L	W	H	F	G	I		A	B	
MSH 30	400	200	600	80	450	500	13	80	80	300 °C
MSH 45	400	200	600	80	450	500	13	80	80	300 °C
MSH 60	440	260	620	80	450	500	26	80	80	300 °C
MSH 75	440	260	620	80	450	500	26	80	80	300 °C
MSH 90	440	260	620	80	450	500	28	80	80	300 °C
MSH 120	440	330	680	80	450	500	28	80	80	300 °C
MSH 150	440	330	680	80	450	500	32	80	80	300 °C
MSH 180	880	330	680	80	450	500	35	80	80	300 °C
MSH 240	880	330	680	80	450	500	42	80	80	300 °C

TYPE	MINIMUM ROOM				MAXIMUM ROOM		Phase	VAC	AMPS	WIRE SIZE
	Watts	Floor	Ceiling	Volume	Ceiling	Volume				
	KW	M2	Height	M3	Height	M3				
MSH 30	3	1.5	1.9	2	2.4	4	3	220	13.0	4 x 25 mm ²
MSH 45	4.5	3	1.9	3	2.4	6	3	220	19.6	4 x 25 mm ²
MSH 60	6	4	1.9	5	2.4	9	3	220	26.1	4 x 4 mm ²
MSH 75	7.5	4.5	1.9	8	2.4	11	3	220	32.6	4 x 4 mm ²
MSH 90	9	5	1.9	10	2.4	13.5	3	220	39.1	4 x 4 mm ²
MSH 120	12	5.5	1.9	12	2.4	18	3	220	52.1	4 x 4 mm ²
MSH 150	15	6.5	1.9	15	2.4	22.5	3	220	65.2	4 x 4 mm ²
MSH 180	18	9	1.9	19	2.4	27	3	220	78.3	4 x 6 mm ²
MSH 240	24	12	1.9	25	2.4	36	3	220	104.3	4 x 10 mm ²